



Tecnica	
<b>System</b>	
Procesador Principal	Procesador de 32 bits
Sistema Operativo	LINUX
<b>Video &amp; Audio</b>	
Analógico	4 Channel, BNC
HDCVI Camera	4K, 6MP, 4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/30fps
AHD Camera	5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps
TVI Camera	5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps
CVBS Camera	PAL/NTSC
IP Camera Input	4+2 Channel, each channel up to 8MP
Audio In/Out	1/1, RCA
Two-way Talk	Reuse audio in/out, RCA
<b>Recording</b>	
Compression	H.265+/H.265/H.264+/H.264
Resolution	4K, 6MP, 5MP, 4K-N, 4MP, 3MP, 4M-N, 1080P, 720P, 960H, D1, CIF
Record Rate	Main stream: the 1st channel 4K(1~7fps), 6MP(1~10fps), 5MP(1~12fps), 4MP/3MP(1~15fps), others 4K-N(1~7fps), 4MP/3MP(1~15fps); 4M-N/1080P/720P/960H/D1/CIF (1~25/30fps) Sub stream: 960H(1~15fps); D1/CIF(1~25/30fps)
Bit Rate	32Kbps ~ 6144Kbps Per Channel
Record Mode	Manual, Schedule (General, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
Audio Compression	AAC(only for the 1st channel), G.711A, G.711U, PCM
Audio Sample Rate	8KHz, 16 bit Per Channel
Audio Bit Rate	64Kbps Per Channel
<b>Display</b>	
Interface	1 HDMI, 1 VGA
Resolution	HDMI:2560x1440, 1920x1080, 1280x1024, 1280x720 VGA: 1920x1080, 1280x1024, 1280x720
Multi-screen Display	When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/6
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
<b>Network</b>	
Interface	1 RJ-45 Port (100M)
Network Function	HTTP, HTTPS, TCP/IP, IPv4/IPv6, Wi-Fi, 3G/4G, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Supports Dahua IP camera, DVR, NVS, etc.)
Max. User Access	128 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF 16.12, CGI Conformant

## Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis
Alarm input	N/A
Relay Output	N/A

## Playback and Backup

Playback	1/4
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

## Storage

Internal HDD	1 SATA Port, up to 10TB capacity
eSATA	N/A

## Auxiliary Interface

USB	2 USB Ports (2 USB 2.0)
RS232	N/A
RS485	1 Port, for PTZ Control

## Electrical

Power Supply	DC12V/2A
Power Consumption (without HDD)	<10W

## Construction

Dimensions	Compact 1U, 260x236x48mm(10.2"x9.3"x1.9")
Net Weight (without HDD)	0.9kg ( 2.0lb)
Gross Weight	1.6kg (3.5 lb)
Installation	Desktop installation

## Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 10% ~ 90% RH
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F) , 0% ~ 90% RH

## Third-party Support

Third-party Support	Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more
---------------------	---




## Certifications

Certifications	FCC: Part 15 Subpart B
	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024
	UL: UL 60950-1

Ordering Information


Type	Part Number	Description
4 Channel XVR	DH-XVR5104HS-4KL-X	4 Channel Penta-brid 4K Compact 1U Digital Video Recorder

Dimensions (mm)

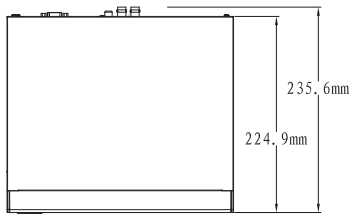

Rear Panel

DH-XVR5104HS-4KL-X

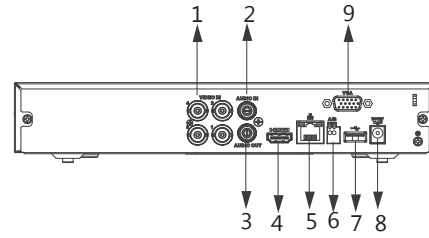

- |   |                          |   |                    |
|---|--------------------------|---|--------------------|
| 1 | VIDEO IN                 | 6 | RS485 Interface    |
| 2 | AUDIO IN, RCA Connector  | 7 | USB Interface      |
| 3 | AUDIO OUT, RCA Connector | 8 | DC 12V Power Input |
| 4 | HDMI Interface           | 9 | VGA Interface      |
| 5 | Network Interface        |   |                    |